


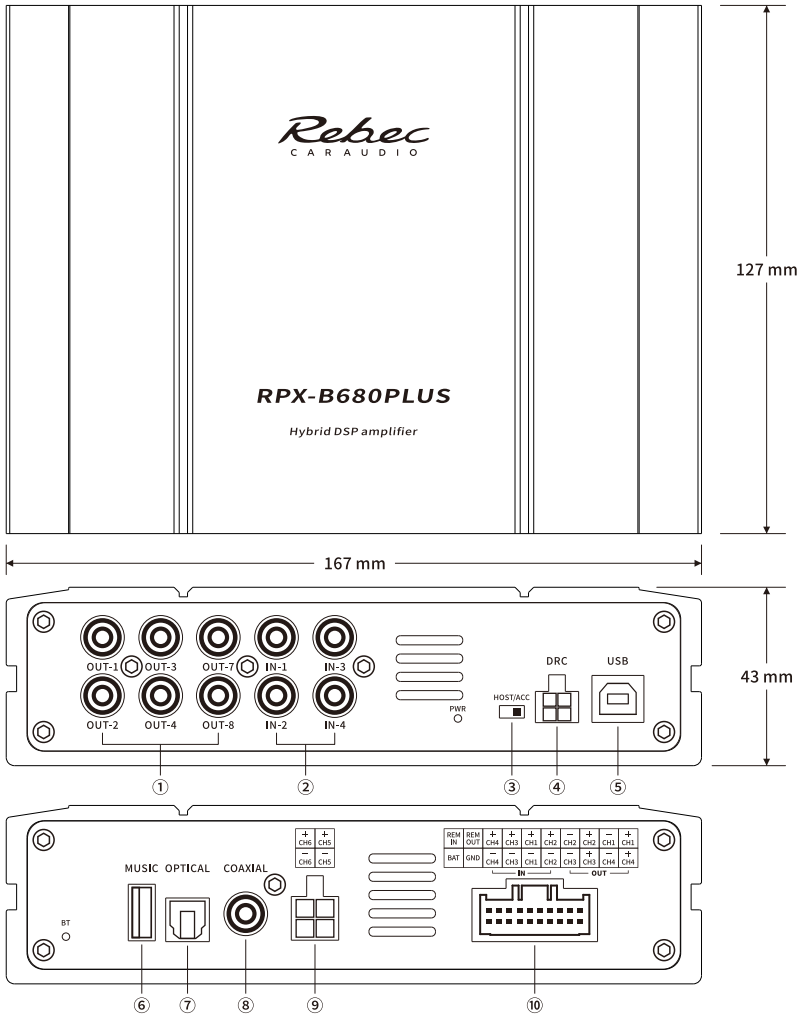

- ① Low Level output ② Low Level input ③ Activate Selection Button: ACC or HOST
- ④ Control Panel Connection Port ⑤ Computer Connection Port ⑥ USB Playback Port
- ⑦ Optical Input ⑧ Coaxial Input ⑨ High Level output ⑩ Dedicated Docking Port


Dimensions & Terminals

Bluetooth Connection Tutorial

When the amplifier is in working mode, the phone can search for the device name of "CAR_DSP_C5.2" through Bluetooth function, and click this option to perform Bluetooth pairing.

INSTALLATION TIP:

- It is forbidden to dismantle and change the product by oneself. disassembly and modification of the product may cause accidents, fire or electric shock.
- This product is recommended for use in automotive environments with a DC voltage range of 12-14.4 v beyond which failure may occur.
- Before wiring, be sure to disconnect the cable from the Power Terminal First, other-wise it is easy to cause short circuit and cause fire.
- Do not use the screws and nuts in the brake system when installing and grounding cables. This will cause the brake system to fail and cause an accident.
- Protect the cable from damage caused by pulling, cutting and short-circuiting.

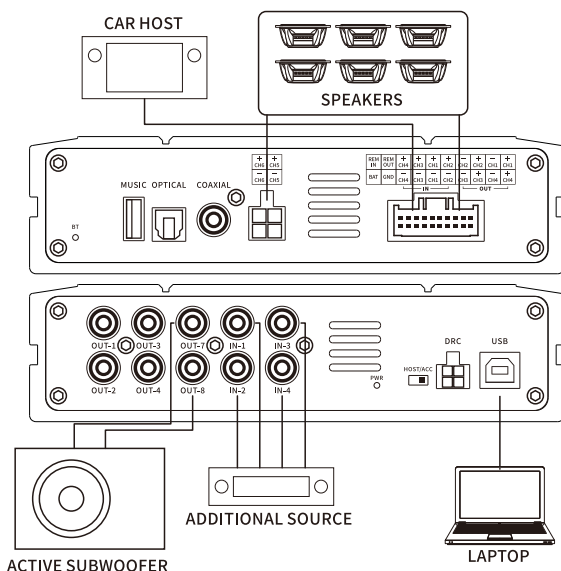

Connection Indicator Diagram

Input	USB lossless playback	Output Power(MAX)	65W×4ch+100W×2ch
	4-channel low level input	Frequency Response	20Hz~20KHz
	4-channel high level input	DSP Frequency Sampling	48KHz
	Optical input	Signal to Noise Ratio	105dB
	Coaxial Input	Total Harmonic Distortion	<0.01% (low level output)
Output	6-channel high level output		<0.03% (high level output)
	6-channel low level output	Bluetooth Version	Bluetooth 5.0
RCA Output Voltage	2.35Volts	Operating Voltage	10-16 Volts